
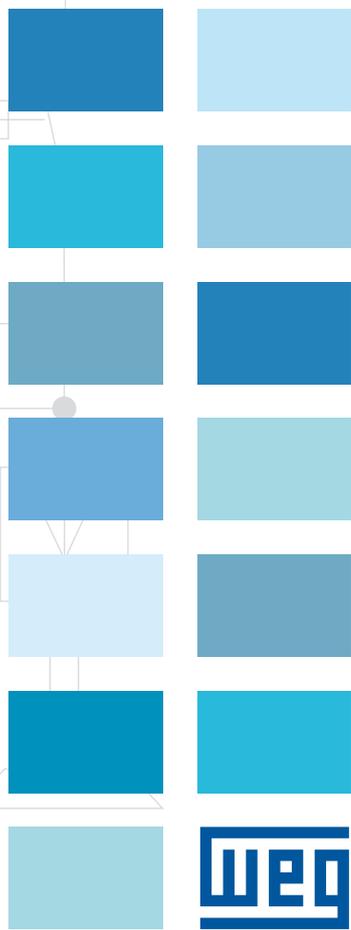


CFW11

Variable Speed Drives

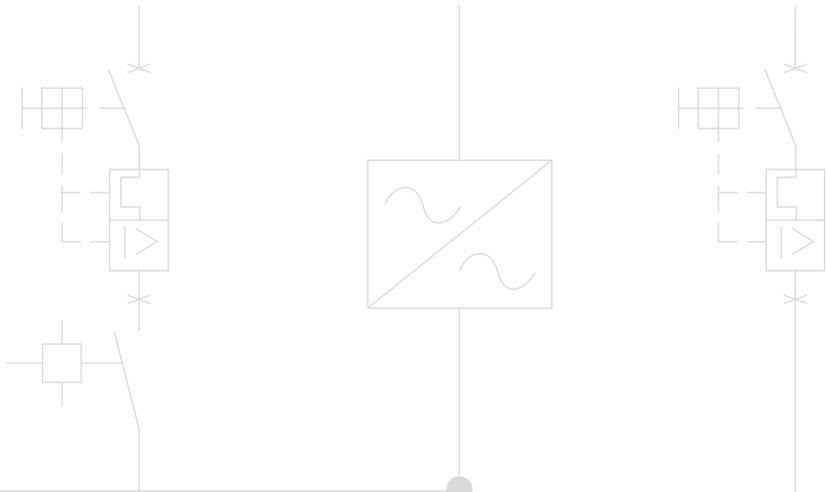

CFW11

The CFW11 is a system drive designed for the control of squirrel cage induction motors. It can be used in a wide range of applications, since it is designed for running on either Normal or Heavy Duty loads. Its performance is excellent, providing increased productivity and an improvement in the quality of the process in which it is used.

1.1 to 2.2 kW - 1.5 to 3 HP
200-240 V AC - Single-phase

1.1 to 55 kW - 1.5 to 75 HP
200-240 V AC - Three-phase

1.5 to 415 kW - 2 to 600 HP
380-480 V AC - Three-phase

1.5 to 315 kW - 2 to 450 HP
500-600 V AC - Three-phase

1.5 to 355 kW - 3 to 450 HP
660-690 V AC - Three-phase



Innovative and simple

The CFW11 presents many innovations that are helpful and beneficial to customers, mainly due to the simplicity of its installation and operation. The CFW11 was developed based on Plug-and-Play philosophy (connect and use) allowing simple and fast installation of the VSD and its accessories. The Keypad has a navigation and programming system similar to mobile phones, with soft-key buttons. It is possible to access the parameters sequentially or through groups of parameters. The Keypad also makes the Oriented Start-up function available, guiding the user through the necessary programming.



Flexibility

The CFW11 adapts to the customer's needs through a broad range of accessories which are easily installed. Besides this, the standard product comes with a small PLC called Soft PLC that offers PLC functionalities and it allows the customer for creation of his/her own user applications through the WLP software (programming in LADDER).



Technology - Patents

Vectrue Technology®

WEG VARIABLE SPEED DRIVE CONTROL TECHNOLOGY


- Linear and adjustable V/f, VVW (Voltage Vector WEG) and vector control are available in the same product.
- Two types of vector control: Sensorless and closed loop Vector control (Encoder Interface required).
- Sensorless vector control permits high torque and quick response in open loop, even at low speeds.
- The self-tuning function automatically matches the vector control or VVW to the motor and load used.
- Through the adjustable V/f control, it is possible, for example, to adjust a quadratic V/f curve, providing energy savings for quadratic torque loads (e.g.: centrifugal pumps and fans).

Optimal Braking®

In applications involving high inertia loads and short deceleration times is required, a large amount of energy is returned from the motor to the VSD. To handle this energy, traditional VSDs have to dissipate it as heat in power resistors. Such resistors are usually large and some installation criteria must be considered due to their heat dissipation.

As an alternative to the use of braking resistors, CFW11 features a special braking method in vector control mode known as Optimal Braking®. This innovation delivers a high performance braking torque without requiring a braking resistor.

The following graph shows the advantages of using Optimal Braking® compared to other methods, thus ensuring an optimized and low cost solution for braking applications.

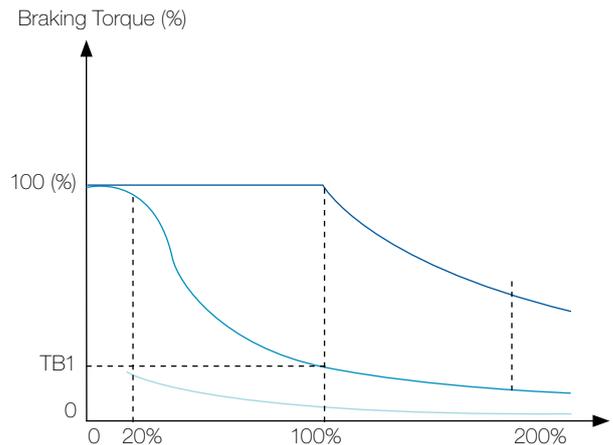

Typical Braking Torque x Speed Graph for a 10 HP / 7.5 kW motor driven by a CFW11

- Dynamic Braking Torque Curve
- Optimal Braking® Torque Curve
- DC Braking Torque Curve

Wmagnet Drive System®

Frequency Inverter controlling permanent magnet motors. The WMagnet System (WMagnet motor + CFW11) has the highest efficiency levels in the market.

It is a perfect match for applications where speed variation, low noise level and reduced size are required. In Sensorless mode the Wmagnet System is able to perform torque control at zero speed without the need for forced ventilation.

Main characteristics of the set CFW11 + WMagnet motor

- Voltage Range: 380 V to 480 V AC
- Power Rating: 11 to 160 kW (15 to 220 HP)
- Methods of control: Sensorless Vector and closed loop control (vector with encoder)
- WMagnet control Algorithm included on the CFW11 standard version
- Variety of communication protocols (Fieldus) is available when running WMagnet control also CFW11 communication modules are utilized.
- Fieldbus modules available: Modbus RTU, Modbus TCP, Profibus DP-V1, DeviceNet, CANopen and Ethernet / IP.



Optimal Flux®

TECHNOLOGY FOR MOTORS DRIVEN BY VSDs IN APPLICATIONS WITH CONSTANT TORQUE LOADS

- Rated torque at low speeds eliminating the need for independent ventilation or motor oversizing.
- Space saving and cost reduction of the application.
- Improved performance of the package VSD and motor (an exclusive WEG solution).

The Optimal flux function works when the set High Efficiency WEG motor + CFW11/09 is used.

Applications

The CFW11 can be used in both simple and sophisticated applications, due to its broad range of functions and easy configuration, installation and operation. The CFW11, through its Vectrue Inverter technology, presents excellent static and dynamic performance, precise torque and speed control, dynamic response, positioning precision, and high overload capacity. The CFW11 was also developed for applications where the decisive factor is safety, through several built-in protections and alarms as well as through the safety stop function in accordance with EN 954-1, category III.




Multi-Pump Control

The CFW11 features the Multipump Control, which permits the CFW11 to control up to 5 pumps in order to keep constant pressure regardless of the flow fluctuations. In this system, an intelligent algorithm control of pumps provided by means of a user application developed to run on CFW11 decides when to start or stop each pump based on the system demand. Besides that, the VSD also monitors the suction pressure and the tank level.

The CFW11 also alternates the pumps according to their operating time, thus ensuring an uniform wear and tear of motors and pumps.

Two types of Multipump Control are available: fixed and floating controls. In fixed control, the VSD is able to control one of the pumps at variable speed and to start and stop another 4 pumps at fixed speed. In floating control, the VSD is able to control up to 4 pumps, all of them at variable speed.

The Multipump Control for CFW11 is available as an user application for running on Soft PLC (see page 14) and can be downloaded from www.weg.net

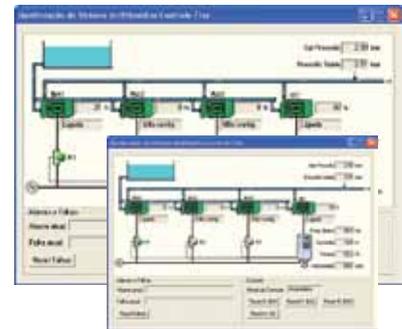

Pumps and fans

- Precise control of process variables (pressure, flow, temperature, etc.) through a PID regulator superposed to the speed control.
- Optimization of power consumption through speed control with an adjustable V/f curve.
- Possibility of safety and maintenance signalling and alarms of pumps and fans.
- Availability of PID regulators to control other process accessories like valves, dumpers, other VSDs, etc.



Compressors

- Optimization of system pressurization control with energy savings and improvement of compressor efficiency.
- Reduction of motor startup current minimizing wear and tear of the mechanical system avoiding fees charged by the power supplier company.
- Possibility of safety and maintenance signaling and alarms of pressurization system.
- Provides startup system control of other compressor units with an increased efficiency of the pressurization system.



Applications

Paper and Cellulose / Wood

- Three monitoring parameters displayed at once on the keypad.
- USB communication port at the front of the VSD for data monitoring and parameters configuration via software Superdrive.
- Precise speed and torque control.
- Flexible hardware programming and configuration, making applications where synchronism is required easier.
- Possibility to be integrated in a variety of communication protocols commonly used in industry.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no derating.
- Quick and simplified programming.
- Highly reliable and robust.
- For large power ratings modular topology can be used (CFW11M).



Cement and Mining

- Robust and large overload capacity (models sized in HD).
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no derating.
- Possibility to be integrated in a variety of communication protocols commonly used in industry.
- Quick and simplified programming.
- Highly reliable and robust.
- For large power ratings modular topology is used (CFW11M)



Chemical and Petrochemical

- Highly reliable and robust.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no derating.
- Plug-and-play system for additional modules, ensuring greater flexibility in adapting to existing systems.
- Possibility to be integrated in a variety of communication protocols commonly used in the industry.



Ironworks and Metallurgy

- Highly precise speed and torque control.
- Large overload capacity (models sized in HD).
- Flexible hardware programming and configuration.
- Possibility to be integrated in a variety of communication protocols mainly used in the industry.
- Provided in a compact design the CFW11 Series allows the assembly directly next to one another with no derating.
- For large power ratings modular topology is used (CFW11M).



Applications

OverHead Cranes / Lifting

- SoftPLC function.
- Three modes of vector control.
- Highly compact.
- Intelligent control of ventilation system.



Cooling

- SoftPLC function built in the standard product enabling the use of two controllers simultaneously. This characteristic is for HVAC applications.
- Three monitoring parameters displayed at once on the keypad.
- USB communication port at the front of the VSD for data monitoring and parameters configuration via software Superdrive.




Sugar and Alcohol

- Modular and compact.
- 12-pulse rectifier for reduction of harmonic content.
- Regenerative rectifier for centrifuges.
- Highly robust and reliable.



Process Machines

- Built-in PLC and Real Time Clock.
- Easiness and flexibility for connecting to the most used fieldbus network.
- Fieldbus.
- Precise speed and torque in all speed ranges.
- User friendly interface and programming.

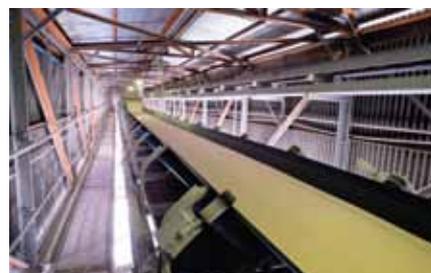

Keypad

The CFW11 keypad was developed for simple and fast interaction while providing excellent visibility for the user.

Easy to use Interface Tools:

- Graphic display.
- Soft-keys for easy operation.
- Backlight.
- Real time clock.
- Copy function.
- Plug-in (connection with CFW11 turned on).
- Language selection.
- Remote Keypad.



Left soft-key: function defined by the display

Right soft-key: function defined by the display

Key for scrolling through menus and parameters and for modifying parameter content

FWD/REV Selection

Start key

Local / Remote Selection

Stop key

JOG key




Remote Keypad

The Keypad can be installed on panel doors or machine consoles with a protection degree of IP56.

Monitoring Modes

The keypad can be configured to display reading parameters in three different modes.

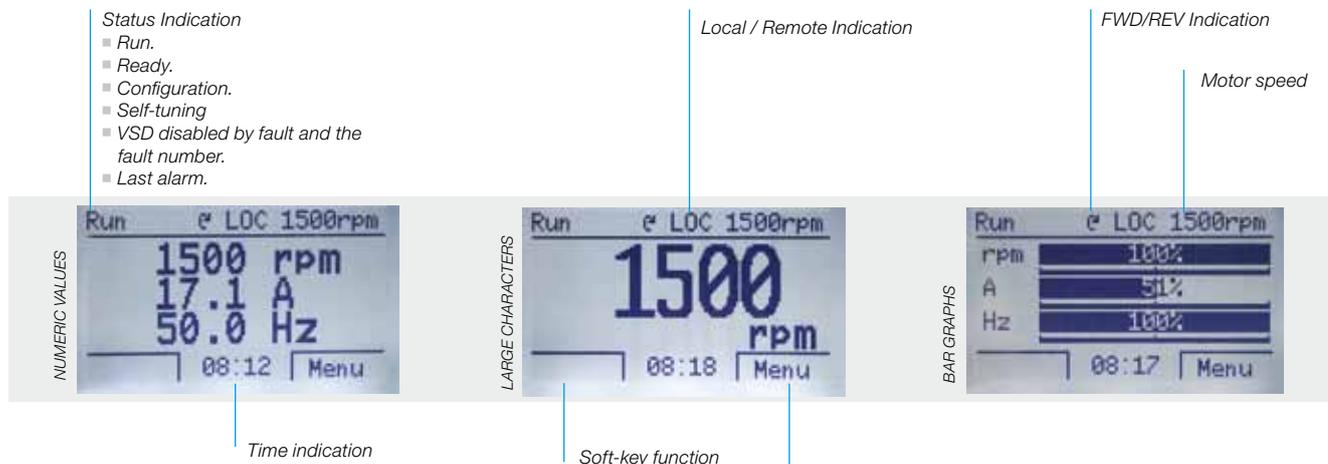

The keypad displays parameters in a hierarchy mode organized by groups.

Oriented Start-up

For simplified Start-up, the CFW11 guides the user through the necessary programming to adjust the VSD to the motor and power supply.




Basic Application

The Basic Application Group contains the basic parameters, which need to be adjusted in most applications. The CFW11 guides the user through these parameters.





Fault History Group

It shows the parameters with the last 10 faults and the day, month, year and time when they occurred.

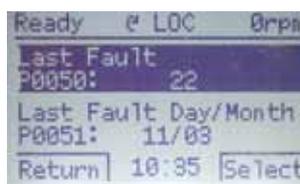

Read Only Parameters Group

It shows reading parameters only.

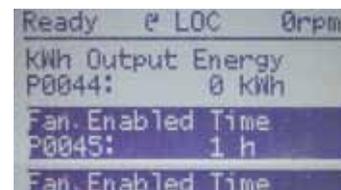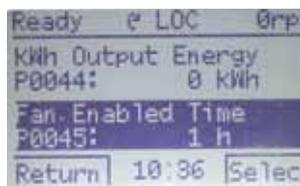

Backup Parameters Group

The Backup Parameters Group allows CFW11 parameters to be transferred to the Keypad or FLASH Memory Module (available in the standard product) and vice versa. During CFW11 operation, the modified parameters are saved in the FLASH Memory Module automatically.

Functions Group

The keypad offers the functionality of displaying parameter groups in individual folders where each of them shows specific configurations. For example: I/O Configuration, Self-tuning procedure, Basic Parameters, etc.

Selectable Language

The user can choose the Keypad language: Portuguese, English, Spanish, German, etc.

Changed Parameters Group

It shows only the parameters that have been programmed differently from the factory default.

Accessories

The CFW11 was developed based on Plug and Play philosophy identifying automatically accessories plugged in as well as easy installation and safe operation with no need for extra configuration.



Accessories

| | Name | Description | Slot | Appearance |
|------------------------|--------|---|------|---|
| I/O Expansion | IOA-01 | 1 14-bit analog inputs in voltage or current 2 digital inputs 2 14-bit analog outputs in voltage or current 2 open collector digital outputs | 1 |  |
| | IOB-01 | 2 isolated 12-bit analog inputs 2 digital inputs 2 isolated 11-bit analog outputs in voltage or current 2 open collector digital outputs | 1 |  |
| | IOC-01 | 8 Digital Inputs 4 Digital Outputs (Use with Soft PLC) | 1 |  |
| | IOC-02 | 8 Digital Inputs 8 Open Collector Digital Outputs (Use with Soft PLC) | 1 |  |
| | IOE-01 | 5 PTC type temperature sensor Inputs | 1 |  |
| | IOE-02 | 5 PT100 type temperature sensor Inputs | 1 |  |
| | IOE-03 | 5 KTY84 type temperature sensor Inputs | 1 |  |
| Interface with Encoder | ENC-01 | Incremental encoder module 5 to 12 V DC (internal power supply) 100 kHz With encoder signal repeater (External power supply needed) | 2 |  |
| | ENC-02 | Incremental encoder module 5 to 12 V DC (internal power supply) 100 kHz | 2 |  |

Accessories

| | Name | Description | Slot | Appearance |
|---------------|----------------|--|-----------|---|
| Communication | RS485-01 | RS485 Serial Communication Module (Modbus-RTU) | 3 |  |
| | RS232-01 | RS232C Serial Communication Module (Modbus-RTU) | 3 |  |
| | CAN/RS485-01 | CAN/RS485 Interface Module (CANopen, DeviceNet and Modbus) | 3 |  |
| | CAN-01 | CAN Interface Module (CANopen and DeviceNet) | 3 |  |
| | PROFIBUS DP-01 | Profibus DP-V1 Interface module | 3 |  |
| | PROFDP-05 | Profibus DP-V1 Module (Anybus) | 4 |  |
| | DEVICENET-05 | DeviceNet Module (Anybus) | 4 |  |
| | RS232-05 | RS232 Interface Module (passive) (Modbus-RTU) | 4 |  |
| | RS485-05 | RS485 Interface Module (passive) (Modbus-RTU) | 4 |  |
| | MODBUS TCP-05 | RS485 Modbus TCP Interface Module - 1 Port | 4 |  |
| | | RS485 Modbus TCP Interface Module - 2 Ports | 4 |  |
| | PROFINETIO-05 | Profinet IO Interface Module (Anybus) | 4 |  |
| | ETHERNET/IP-05 | Ethernet/IP Interface Module - 1 Port | 4 |  |
| | | Ethernet/IP Interface Module - 2 Ports | 4 |  |
| PLC Functions | PLC11-01 | Module with PLC Functions (see page 15) | 1,2 and 3 |  |
| | PLC11-02 | Module with PLC Functions (see page 15) | | |

Accessories

Kit for power cable shielding

CFW11 has a kit to simplify the connection of the motor cable shield to ground, providing a low-impedance connection for high frequencies.

| Name | Description |
|---------|---|
| PCSA-01 | Kit for power cable shielding for frame size A |
| PCSB-01 | Kit for power cable shielding for frame size B |
| PCSC-01 | Kit for power cable shielding for frame size C |
| PCSD-01 | Kit for power cable shielding for frame size D or 2D (IP54) |
| PCSE-01 | Kit for power cable shielding for frame size E or 3 (IP54) |
| PCS1-01 | Kit for power cable shielding for frame size 1 (IP54) |
| PCSC-02 | Kit for power cable shielding for frame size 2C |



Note: 1) The kit for power cable shielding PCSA-01, PCSE-01 is provided along with VSDs having factory fitted RFI filter.
 Example: EU CFW11 0007 T 2 O FA Z
 2) In frame sizes D and E the power cable shielding kit is factory standard, even for VSDs without internal RFI filter;
 3) N/A for frame sizes F and G.

Enclosures

| Standards | Ratings | Frame Sizes | | | | | |
|-----------|---------|-------------|---------|---------|-----------|-------------------|-------------------|
| | | A | B | C | D | E | F & G |
| IEC | IP20 | - | - | - | X | X | X |
| | IP21 | X | X | X | KIP21D-01 | - | - |
| NEMA | TYPE 1 | KN1A-01 | KN1B-01 | KN1C-01 | X | KN1E-01 / KN1E-02 | KN1F-01 / KN1G-01 |

(X) Standard
 (-) N/A

| Standard | Accessory | Composition |
|------------|-----------|---|
| NEMA Type1 | KN1A-01 | Conduit kit frame size A |
| | KN1B-01 | Conduit kit frame size B |
| | KN1C-01 | Conduit kit frame size C |
| | KN1E-01 | Top cover size E models 105 and 142 |
| | KN1E-02 | Top Cover + Conduit kit size E models 180 and 211 |
| | KN1F-01 | Conduit kit for frame size F |
| | KN1G-01 | Conduit kit for frame size G |
| IEC | KIP21A-01 | Top cover kit frame size A |
| | KIP21B-01 | Top cover kit frame size B |
| | KIP21C-01 | Top cover kit frame size C |
| | KIP21D-01 | Top cover kit frame size D |

Note: In the KN1X-01 Conduit kit (frame sizes A,B and C) power cable shielding is also provided



Accessories / Optionals

Safety stop in accordance with EN 61800-5-2, EN ISO 13849-1, IEC 62061, IEC 61508 Parts 1-7, EN 50178, IEC 60204-1, Cat. 3/PL d acc. and SIL CL2 acc.

With the activation of the safety stop function, the PWM pulses of the IGBTs are disabled. Since no voltage is available at VSD output, no torque is applied to the motor. Thus, it is ensured that the motor remains stopped providing system safety.



Note: This optional must be factory fitted (see product coding on page 26).

Accessories / Optionals

Blank cover – HMID - 01¹

Blank cover to replace the standard VSD keypad when not used.



Remote keypad frame – RHMIF-01

Frame for Keypad installation on panel door or machine console. Degree of protection IP56.



External control supply in 24 V DC¹

Used with communication networks (Profibus DP, DeviceNet, EtherNet/IP, etc.) so that the control circuit and the interface for the communication network continue working even if the AC supply is removed.




¹ This optional must be factory fitted and orders must specify on the product coding (page 26) the desired option.

RFI suppressor filter¹ (for the VSD to be in accordance with EN 61800-3 and EN 55011)

CFW11 models with built-in RFI filter, when properly installed, meet the requirements of the electromagnetic compatibility directive – “EMC Directive 2004/108/EC”.

Example: EU CFW11 0007 T 2 O FA Z

For models from frame size A to D, the RFI filter is optional. But for models in frame size E, the RFI filter is included in the standard product.

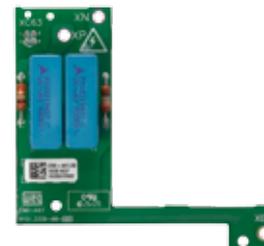

¹ This optional must be factory fitted and orders must specify on the product coding (page 26) the desired option.

CFW11 - Dynamic Braking module DBW03D

The DBW03, with its autonomous capability allows for the energy to return from regenerative cycles or even from motors when running high inertia load requiring short deceleration times to dissipate it in resistors.

This braking unit was developed specially for VSDs with unavailability of the braking circuit factory integrated, e.g. frame sizes F and G and Modular Drive. Its voltage ranges from 380 to 480 V AC, from 500 to 690 V AC and its main function is to limit DC bus voltage in order to avoid the VSD from tripping due to overvoltage caused by applications where braking is mandatory.



| Braking Module Model | | |
|--------------------------------|--------------------------|---------------------|
| | DBW03 0380 D 3848SZ | DBW03 0250 D 5069SZ |
| Maximum output current | 380 A | 250 A |
| Minimum resistor | 1.8 Ω | 2.6 Ω |
| External power supply for fans | 220 V AC +/- 5% @ 250 mA | |

Accessories

PLC Accessory - PLC11


PLC11 accessory provides the CFW11 with PLC functionality, speed reference generator and motion control functions. It comes in two options: PLC11-01 and PLC11-02 (see differences in the table below).

In many applications, this accessory allows the CFW11 to replace an external PLC, reducing application costs.



Features:

- Motion control with trapezoidal “S” profiles (absolute and relative)
- Machine initial position search (homing)
- Ladder programming through WLP Software with timers, counters, coils and contacts
- RS485 serial interface with Modbus-RTU protocol
- 100 configurable parameters available to the user via keypad or WLP
- Master/Slave function (Electronic Gearbox)
- CAN interface for CANopen and DeviceNet protocols
- CANopen Master, which allows CFW11 to control up to 25 slave devices
- WLP/ WSCAN software: network configuration and programming software in the same environment.

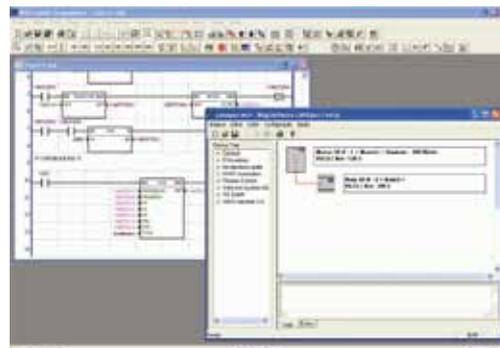

Technical Specification

Inputs/Outputs


- Digital Inputs
- Digital Outputs
- Relay Outputs
- Encoder interface Inputs
- RS485 Interface
- CANopen Interface
- Analog Outputs
- Analog Inputs

PLC11-01


- 9 Bidirectional isolated Inputs 24 V
- 3 Bidirectional isolated open-collector outputs: 24 V DC, 500mA
- 3 Outputs NO contacts: 250 V AC, 3A
- 2 Incremental Encoder Inputs 5...12 V DC, 500mA (internal power supply)
- 1 RS485 port (Modbus RTU available)
- 1 CAN port (CANopen and Devicenet available)
- 1 Differential input: -10...+10 V DC / 0...20mA, 14 bits
- 2 Analog outputs: -10...+10 V DC/ 0...20mA, 12 bits

PLC11-02

- 4 Bidirectional isolated Inputs 24 V
- 3 Bidirectional isolated open-collector outputs: 24 V DC, 500mA
- 1 Outputs NO contacts: 250 V AC, 3A
- 2 Incremental Encoder Inputs 5...12 V DC, 500mA (internal power supply)
- 1 RS485 port (Modbus RTU available)
- 1 CAN port (CANopen and Devicenet available)

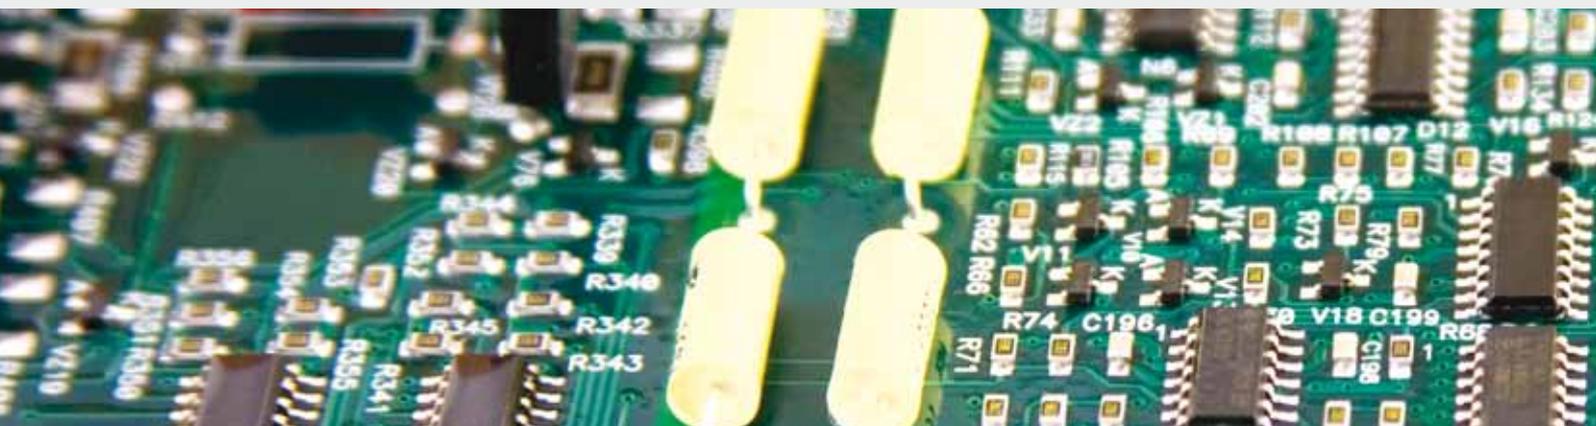

Example of use of PLC11-01 as CANOpen network master

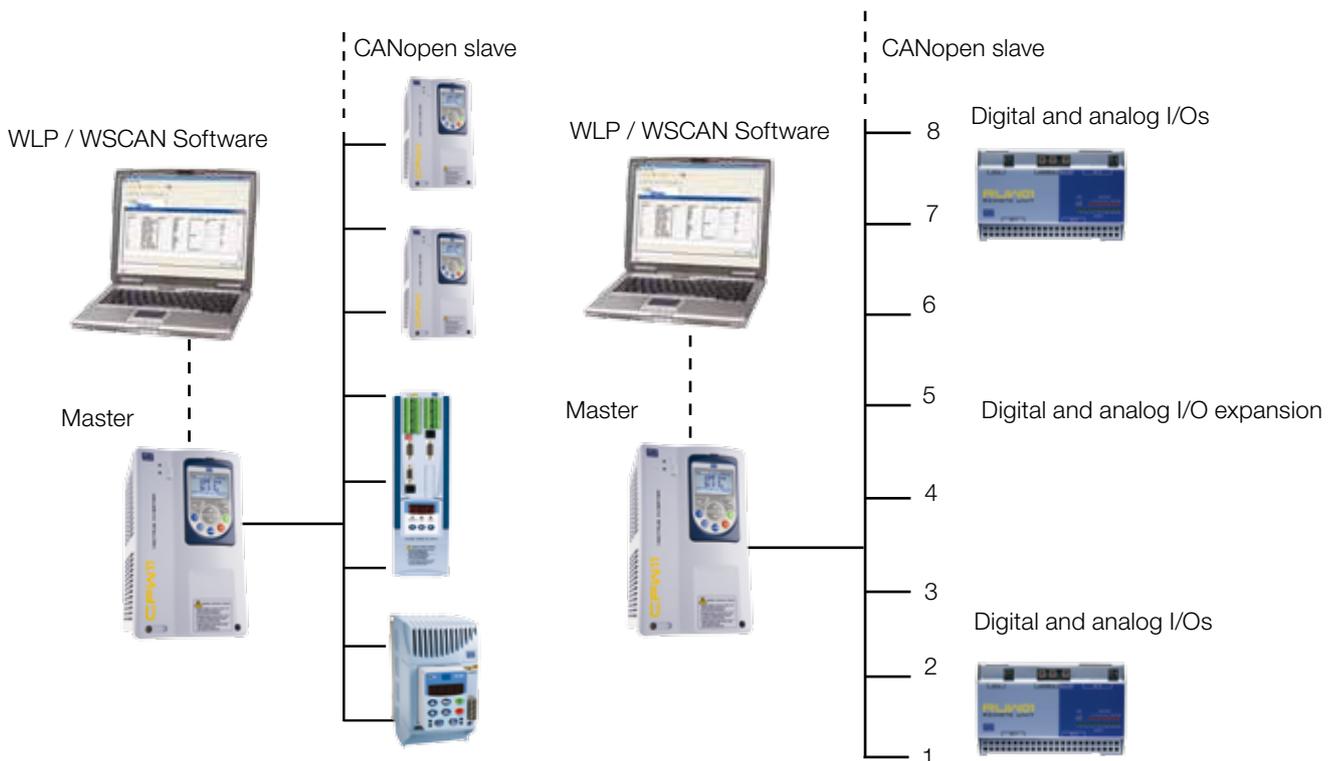

USB Connection

SuperDrive G2

It is a Windows-based software for CFW11 programming, control and monitoring. The following features are available in the software:

- Automatic CFW11 identification
- Monitoring of CFW11 parameters
- Online changing of parameters in the CFW11
- Offline changing of parameters in the PC
- Creation of application documents
- Trace function (see below)
- Upload of SoftPLC applicative software in the CFW11 flash memory (see page 16)
- Online troubleshooting

This software is available free of charge at www.weg.net



Monitoring and parameterization of the list of parameters. Comparison to factory default is easy.




Integrated environment



Monitoring and command window using virtual Keypad. Start/Stop function, JOG, local / remote, Reverse and reset



Parameter setting



Status monitoring

USB Connection

Trace Function

Trace function is used to register CFW11 variables (like current, voltage, speed, etc.) when a given event occurs in the system (eg.: alarm / fault, overload, overvoltage, etc.).

When a given event takes place the trigger function activates data storage process.

The stored variables can be visualized in the form of graphs by using the SuperDrive G2 software. Trace function simulates a 4-channel oscilloscope. It is a very powerful tool to be used on start-up procedures of systems and on diagnoses of faults.



Example of graph visualization screen




Trace function configuration in the SuperDrive G2

SoftPLC Function

It is a resource that provides PLC features to the CFW11 without the addition of any accessories. It provides flexibility to the product, allowing the user to create his/her own applicative software (user's program). The SoftPLC main features are:

- Ladder language programming using WLP software
- Access to all VSD parameters and I/Os
- Configurable PLC, mathematical and control blocks
- Applicative software download, upload and online monitoring via USB connection
- Storage of user application in the CFW11 Flash Memory Module (see below)
- Memory capacity of 15kB for storage of a user application

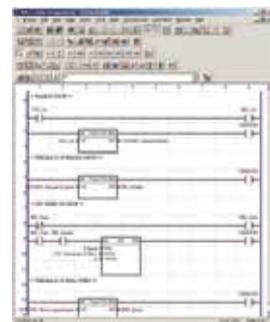

Simple and practical programming environment

- 49 User parameter settings that can be individually programmed allowing tags, units, minimum and maximum values, number of decimal digits and other characteristics to be changed.

| Parameter | Tag | Unit | Minimum | Maximum | D | H | R | S | L | P | R | A |
|-----------|---------------|------|---------|---------|---|---|---|---|---|---|---|---|
| P1010 | Uw_Cc | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1011 | Uw_Velocidade | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1012 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1013 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1014 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1015 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1016 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1017 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1018 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1019 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1020 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1021 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1022 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| P1023 | Parametro PLC | | 0 | 32767 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |

Flash Memory Module

- It stores CFW11 parameters. It ensures that the programming will not be lost as there is a backup of the parameters.
- It permits the transfer of parameters stored in the flash Memory Module to the CFW11 and vice versa. It is an useful function for machine manufactures or in processes where parameter settings are repeated (Copy Function).
- It stores the applicative software generated by the SoftPLC function.


The Flash Memory Module comes as standard on CFW11 series.



Technical Features

Built-in DC link Reactor

- Allows the VSD to be installed in any network (there is no minimum impedance restriction).
- Typical power factor (PF) for rated condition:
0.94 for models with three-phase supply
0.70 for models with single-phase supply/three-phase supply = 0,94
- Displacement Power factor > 0,98
- Meets the 61000-3-12 standard, related to low order current harmonics in the network

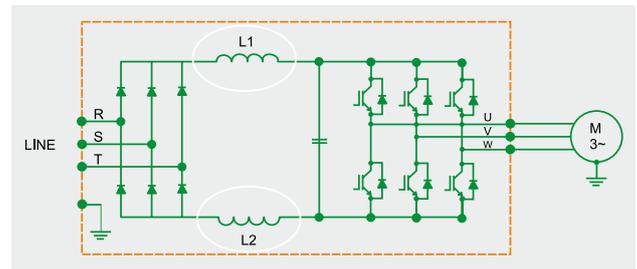

No need for external line reactor


Single DC Busbar

Usually used in multi-motor systems, common DC bus configuration is a good solution for energy savings.

In this configuration, individual VSD rectifier bridges are replaced with a common input rectifier unit. Each VSD is then directly fed from the DC bus to its DC link terminals.

This solution allows the energy in the DC bus to be shared among the VSDs connected to it, thus optimizing the power consumption in the system. The standard CFW11 sizes A to E and special hardware version (DC) for frame sizes F and G can be connected to a DC bus system. (When required the factory should be consulted for further details)

Note: An extra pre-charge circuit must be added to each of the VSDs.

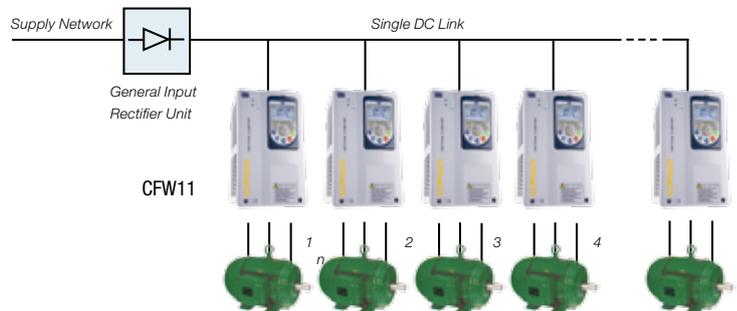

Intelligent Thermal Management

- Monitoring of the heatsink and internal air temperatures of the electronic boards providing total protection of the IGBTs and the CFW11 as a whole.
- The heatsink fan is turned on and off automatically, depending on the temperature of the power modules.
- The speed and the number of hours of operation of the fan are monitored and indicated in corresponding parameters. Alarm or fault messages are generated related to these variables.
- The fan is easily removed for cleaning or replacement.




Functions

- Multi-speed: up to 8 pre-programmed speeds.
- PID regulator: automatic control of level, pressure, flow, weight, etc.
- Ride-Through: operation during momentary Loss of the power supply
- Skip Frequency: rejection of critical or resonant speeds
- S Ramp: smooth acceleration / deceleration

- All CFW11 models from size A to D have built-in braking IGBT in as standard
- CFW11 size E the braking IGBT is optional built-in
- CFW11 sizes F and G, Braking IGBT is optional with the external DBW module
- CFW11 can monitor the temperature probes of the motor (PTC, PT100 KTY84), providing thermal protection to the motor (optional accessory is necessary)
- Operating air temperature up to 50° C (122° F) for sizes A to D, and up to 45° C (113° F) for size E, F and G up to 601A, 40° C (104° F) for size G with 720A
- Motor overload protection according to IEC 60497-4-2 and UL 508 C

Technical Features

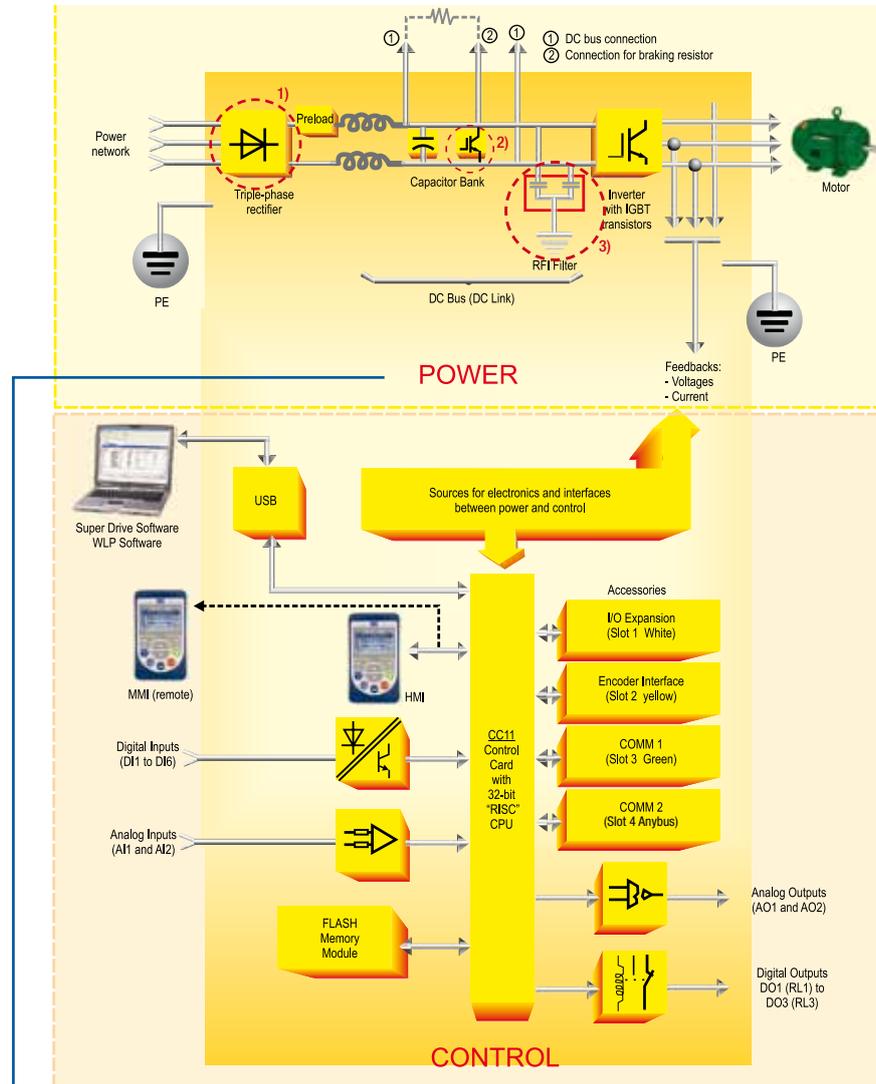

- Notes:
- 1) Half controlled bridge rectifier for sizes F and G;
 - 2) Standard for sizes A to D;
 - 3) Standard RFI filter for sizes E, F and G;

Please refer to the user manual for more information.

Drive Ratings

Normal Duty (ND) Cycle:

- 110% for 60 seconds every 10 minutes
- 150% for 3 seconds every 10 minutes

Heavy Duty (HD) Cycle:

- 150% for 60 seconds every 10 minutes
- 200% for 3 seconds every 10 minutes



Sizing the drive:

The correct way to select a VSD is matching its output current with the motor rated current. However, the tables below present the expected motor power for each VSD model.

Use the motor power ratings below only as a guidance. Motor rated currents may vary with speed and manufacturer.

IEC motor powers are based on WEG 4-poles motors, NEMA motor powers are based on NEC table 430-150.



Motor voltages between 220 V AC and 230 V AC:

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | Heavy Duty (HD) | IEC | | NEMA |
|--------------|-------|------------------|-------------------------------|-------------------|-------------------|-----------------|-------------------------------|-------------------|------|
| | | | 50 Hz 220 V AC 230 V AC | 60 Hz 230 V AC | 60 Hz 230 V AC | | 50 Hz 220 V AC 230 V AC | 60 Hz 230 V AC | |
| | | A | kW | HP | A | kW | HP | | |
| 200-240 V AC | 1Ø | CFW110006S2 | 6 | 1.1 | 1.5 | 5 | 1.1 | 1 | |
| | | CFW110007S2 | 7 | 1.5 | 2 | 7 | 1.5 | 2 | |
| | | CFW110010S2 | 10 | 2.2 | 3 | 10 | 2.2 | 3 | |
| | 1/3Ø | CFW110006B2 | 6 | 1.1 | 1.5 | 5 | 1.1 | 1 | |
| | | CFW110007B2 | 7 | 1.5 | 2 | 7 | 1.5 | 2 | |
| | | CFW110007T2 | 7 | 1.5 | 2 | 5.5 | 1.1 | 1 | |
| | 3Ø | CFW110010T2 | 10 | 2.2 | 3 | 8 | 1.5 | 2 | |
| | | CFW110013T2 | 13 | 3 | 3 | 11 | 2.2 | 3 | |
| | | CFW110016T2 | 16 | 4 | 5 | 13 | 3 | 3 | |
| | | CFW110024T2 | 24 | 5.5 | 7.5 | 20 | 5.5 | 5 | |
| | | CFW110028T2 | 28 | 7.5 | 10 | 24 | 5.5 | 7.5 | |
| | | CFW110033T2 | 33.5 | 9.2 | 10 | 28 | 7.5 | 10 | |
| | | CFW110045T2 | 45 | 11 | 15 | 36 | 9.2 | 10 | |
| | | CFW110054T2 | 54 | 15 | 20 | 45 | 11 | 15 | |
| | | CFW110070T2 | 70 | 18.5 | 25 | 56 | 15 | 20 | |
| | | CFW110086T2 | 86 | 22 | 30 | 70 | 18.5 | 25 | |
| | | CFW110105T2 | 105 | 30 | 40 | 86 | 22 | 30 | |
| 220-230 V AC | 3Ø | CFW110142T2 | 142 | 37 | 50 | 115 | 30 | 40 | |
| | | CFW110180T2 | 180 | 55 | 60 | 142 | 37 | 50 | |
| | | CFW110211T2 | 211 | 55 | 75 | 180 | 55 | 60 | |

Motor voltages between 380 V AC and 480 V AC:

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | Heavy Duty (HD) | IEC | | NEMA | |
|--------------|-------|------------------|-------------------------------|-------------------------------|-------------------|-----------------|-------------------------------|-------------------------------|-------------------|-----|
| | | | 50 Hz 380 V AC 415 V AC | 60 Hz 440 V AC 460 V AC | 60 Hz 460 V AC | | 50 Hz 380 V AC 415 V AC | 60 Hz 440 V AC 460 V AC | 60 Hz 460 V AC | |
| | | A | kW | HP | HP | A | kW | HP | HP | |
| 380-480 V AC | 3Ø | CFW110003T4 | 3.6 | 1.5 | 2 | 2 | 3.6 | 1.5 | 2 | 2 |
| | | CFW110005T4 | 5 | 2.2 | 3 | 3 | 5 | 2.2 | 3 | 3 |
| | | CFW110007T4 | 7 | 3 | 4 | 3 | 5.5 | 2.2 | 3 | 3 |
| | | CFW110010T4 | 10 | 4 | 7.5 | 5 | 10 | 4 | 7.5 | 5 |
| | | CFW110013T4 | 13.5 | 5.5 | 10 | 7.5 | 11 | 5.5 | 7.5 | 7.5 |
| | | CFW110017T4 | 17 | 7.5 | 12.5 | 10 | 13.5 | 5.5 | 10 | 7.5 |
| | | CFW110024T4 | 24 | 11 | 15 | 15 | 19 | 9.2 | 12.5 | 10 |
| | | CFW110031T4 | 31 | 15 | 20 | 20 | 25 | 11 | 15 | 15 |
| | | CFW110038T4 | 38 | 18.5 | 30 | 25 | 33 | 15 | 25 | 20 |
| | | CFW110045T4 | 45 | 22 | 30 | 30 | 38 | 18.5 | 30 | 25 |
| | | CFW110058T4 | 58.5 | 30 | 40 | 40 | 47 | 22 | 30 | 30 |
| | | CFW110070T4 | 70.5 | 37 | 50 | 50 | 61 | 30 | 50 | 40 |
| | | CFW110088T4 | 88 | 45 | 75 | 60 | 73 | 37 | 60 | 50 |
| | | CFW110105T4 | 105 | 55 | 75 | 75 | 88 | 45 | 75 | 60 |
| | | CFW110142T4 | 142 | 75 | 100 | 100 | 115 | 55 | 75 | 75 |
| | | CFW110180T4 | 180 | 90 | 150 | 150 | 142 | 75 | 100 | 100 |
| | | CFW110211T4 | 211 | 110 | 175 | 150 | 180 | 90 | 150 | 150 |
| | | CFW110242T4 | 242 | 132 | 200 | 200 | 211 | 110 | 150 | 150 |
| | | CFW110312T4 | 312 | 160 | 250 | 250 | 242 | 132 | 200 | 200 |
| | | CFW110370T4 | 370 | 200 | 300 | 300 | 312 | 160 | 250 | 250 |
| CFW110477T4 | 477 | 250 | 400 | 400 | 370 | 200 | 300 | 300 | | |
| CFW110515T4 | 515 | 280 | 400 | 450 | 477 | 250 | 400 | 400 | | |
| CFW110601T4 | 601 | 315 | 500 | 500 | 515 | 280 | 400 | 450 | | |
| CFW110720T4 | 720 | 370 | 600 | 600 | 560 | 300 | 450 | 450 | | |

Motor voltages between 500 V AC and 600 V AC

| Power Supply | Model | Normal Duty (ND) | IEC | | | NEMA | Heavy Duty (HD) | IEC | | | NEMA |
|--------------|-------|------------------|----------------|----------------|----------------|------|-----------------|----------------|----------------|----------------|------|
| | | | 50 Hz 525 V AC | 50 Hz 575 V AC | 60 Hz 575 V AC | | | 50 Hz 525 V AC | 50 Hz 575 V AC | 60 Hz 575 V AC | |
| | | | A | kW | kW | | | HP | A | kW | |
| 500-600 V AC | 30 | CFW110002T5 | 2.9 | 1.5 | 1.5 | 2 | 2.7 | 1.5 | 1.5 | 2 | |
| | | CFW110004T5 | 4.2 | 2.2 | 2.2 | 3 | 3.8 | 2.2 | 2.2 | 3 | |
| | | CFW110007T5 | 7.0 | 4 | 4 | 5 | 6.5 | 4 | 4 | 5 | |
| | | CFW110010T5 | 10 | 5.5 | 5.5 | 7.5 | 9.0 | 5.5 | 5.5 | 7.5 | |
| | | CFW110012T5 | 12 | 7.5 | 7.5 | 10 | 10 | 5.5 | 7.5 | 10 | |
| | | CFW110017T5 | 17 | 11 | 11 | 15 | 17 | 11 | 11 | 15 | |
| | | CFW110022T6 | 22 | 15 | 15 | 20 | 19 | 11 | 11 | 15 | |
| | | CFW110027T6 | 27 | 18.5 | 18.5 | 25 | 22 | 15 | 15 | 20 | |
| | | CFW110032T6 | 32 | 22 | 22 | 30 | 27 | 18.5 | 18.5 | 25 | |
| | | CFW110044T6 | 44 | 30 | 30 | 40 | 36 | 22 | 22 | 30 | |
| | | CFW110053T6 | 53 | 37 | 37 | 50 | 44 | 30 | 30 | 40 | |
| | | CFW110063T6 | 63 | 45 | 45 | 60 | 53 | 37 | 37 | 50 | |
| | | CFW110080T6 | 80 | 55 | 55 | 75 | 66 | 45 | 45 | 60 | |
| | | CFW110107T6 | 107 | 75 | 75 | 100 | 90 | 55 | 55 | 75 | |
| | | CFW110125T6 | 125 | 90 | 90 | 125 | 107 | 75 | 75 | 100 | |
| | | CFW110150T6 | 150 | 110 | 110 | 150 | 122 | 90 | 90 | 125 | |
| | | CFW110170T6 | 170 | 110 | 132 | 150 | 150 | 110 | 110 | 150 | |
| | | CFW110216T6 | 216 | 160 | 160 | 200 | 180 | 132 | 132 | 200 | |
| CFW110289T6 | 289 | 200 | 220 | 300 | 240 | 160 | 185 | 250 | | | |
| CFW110315T6 | 315 | 220 | 250 | 300 | 289 | 200 | 220 | 300 | | | |
| CFW110365T6 | 365 | 250 | 280 | 350 | 315 | 220 | 250 | 300 | | | |
| CFW110435T6 | 435 | 315 | 315 | 450 | 357 | 250 | 280 | 350 | | | |

Motor voltages between 660 V AC and 690 V AC:

| Power Supply | Model | Normal Duty (ND) | IEC | IEC | NEMA | Heavy Duty (HD) | IEC | | | NEMA |
|--------------|-------|------------------|----------------|----------------|-------------------------|-----------------|----------------|----------------|-------------------------|------|
| | | | 50 Hz 660 V AC | 50 Hz 690 V AC | 60 Hz 660 V AC 690 V AC | | 50 Hz 660 V AC | 50 Hz 690 V AC | 60 Hz 660 V AC 690 V AC | |
| | | | A | kW | kW | | HP | A | kW | kW |
| 660-690 V AC | 30 | CFW110002T6 | 2.9 | 2.2 | 2.2 | 3 | 2.7 | 1.5 | 1.5 | 2 |
| | | CFW110004T6 | 4.2 | 3 | 3 | 4 | 3.8 | 2.2 | 3 | 4 |
| | | CFW110007T6 | 7.0 | 5.5 | 5.5 | 7.5 | 6.5 | 4 | 5.5 | 6 |
| | | CFW110010T6 | 8.5 | 5.5 | 7.5 | 10 | 7.0 | 5.5 | 5.5 | 7.5 |
| | | CFW110012T6 | 11 | 9.2 | 9.2 | 12.5 | 9.0 | 7.5 | 7.5 | 10 |
| | | CFW110017T6 | 15 | 11 | 11 | 15 | 13 | 11 | 11 | 15 |
| | | CFW110022T6 | 20 | 15 | 15 | 20 | 17 | 15 | 15 | 15 |
| | | CFW110027T6 | 24 | 18.5 | 22 | 25 | 20 | 15 | 15 | 20 |
| | | CFW110032T6 | 30 | 22 | 22 | 30 | 24 | 18.5 | 22 | 25 |
| | | CFW110044T6 | 35 | 30 | 30 | 40 | 30 | 22 | 22 | 30 |
| | | CFW110053T6 | 46 | 37 | 37 | 50 | 39 | 30 | 37 | 40 |
| | | CFW110063T6 | 54 | 45 | 45 | 60 | 46 | 37 | 37 | 50 |
| | | CFW110080T6 | 73 | 55 | 55 | 75 | 61 | 55 | 55 | 75 |
| | | CFW110107T6 | 100 | 90 | 90 | 125 | 85 | 75 | 75 | 100 |
| | | CFW110125T6 | 108 | 90 | 90 | 125 | 95 | 75 | 90 | 100 |
| | | CFW110150T6 | 130 | 110 | 110 | 125 | 108 | 90 | 90 | 125 |
| | | CFW110170T6 | 147 | 132 | 132 | 175 | 127 | 110 | 110 | 150 |
| | | CFW110216T6 | 195 | 185 | 185 | 200 | 165 | 132 | 160 | 200 |
| CFW110289T6 | 259 | 220 | 250 | 300 | 225 | 200 | 220 | 270 | | |
| CFW110315T6 | 259 | 220 | 250 | 300 | 225 | 200 | 220 | 270 | | |
| CFW110365T6 | 312 | 280 | 300 | 350 | 259 | 220 | 250 | 300 | | |
| CFW110435T6 | 365 | 315 | 355 | 450 | 312 | 280 | 300 | 350 | | |

CFW11 - NEMA4x / IP54

The CFW11 IP54 features an IP54 enclosure that protects the drive from splashing water, corrosion and dust.

Improved cooling fans ensure perfect functionality when operating at maximum loading capacity.

Its design is suitable for wall mounting with no need for customized panels allowing for severe environments exposure.

- Chemical Industry
- Petrochemical Industry
- Food Industry

Communication Protocol such as Profibus, DeviceNet, CANopen, Modbus-RTU, Ethernet IP can be added using optional cards.

Note: the operation temperature of the CFW11 - NEMA4X - IP54 is from -10 °C to 40 °C (up to 50 °C with 2% current deranting for each °C over 40 °C)



Motor Voltages 220 V AC / 240 V AC: IP54

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | | Heavy Duty (HD) | IEC | | NEMA | |
|----------------|----------------|------------------|----------|----------|----------|----------|-----------------|----------|----------|------|--|
| | | | 50 Hz | 60 Hz | 50 Hz | 60 Hz | | 50 Hz | 60 Hz | | |
| | | | 220 V AC | 230 V AC | 220 V AC | 230 V AC | | 220 V AC | 230 V AC | | |
| | | A | kW | HP | | | A | kW | HP | | |
| 200-240 V AC | 10 | CFW110006S2054 | 6 | 1.1 | 1.5 | 5 | 1.1 | 1 | | | |
| | | CFW110007S2054 | 7 | 1.5 | 2 | 7 | 1.5 | 2 | | | |
| | | CFW110010S2054 | 10 | 2.2 | 3 | 10 | 2.2 | 3 | | | |
| | 1/30 | CFW110006B2054 | 6 | 1.1 | 1.5 | 5 | 1.1 | 1 | | | |
| | | CFW110007B2054 | 7 | 1.5 | 2 | 7 | 1.5 | 2 | | | |
| | 30 | CFW110007T2054 | 7 | 1.5 | 2 | 5.5 | 1.1 | 1 | | | |
| | | CFW110010T2054 | 10 | 2.2 | 3 | 8 | 1.5 | 2 | | | |
| | | CFW110013T2054 | 13 | 3 | 3 | 11 | 2.2 | 3 | | | |
| | | CFW110016T2054 | 16 | 4 | 5 | 13 | 3 | 3 | | | |
| | | CFW110024T2054 | 24 | 5.5 | 7.5 | 20 | 5.5 | 5 | | | |
| | | CFW110028T2054 | 28 | 7.5 | 10 | 24 | 5.5 | 7.5 | | | |
| | | CFW110033T2054 | 33.5 | 9.2 | 10 | 28 | 7.5 | 10 | | | |
| | | CFW110045T2054 | 45 | 11 | 15 | 36 | 9.2 | 10 | | | |
| | | CFW110054T2054 | 54 | 15 | 20 | 45 | 11 | 15 | | | |
| | | CFW110070T2054 | 70 | 18.5 | 25 | 56 | 15 | 20 | | | |
| | CFW110086T2054 | 86 | 22 | 30 | 70 | 18.5 | 25 | | | | |
| CFW110105T2054 | 105 | 30 | 40 | 86 | 22 | 30 | | | | | |
| 220-230 V AC | 30 | CFW110142T2054 | 142 | 37 | 50 | 115 | 30 | 40 | | | |

Motor Voltages 380 V AC / 480 V AC: IP54

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | | Heavy Duty (HD) | IEC | | NEMA | | |
|--------------|-------|------------------|----------|----------|----------|----------|-----------------|----------|----------|------|--|--|
| | | | 50 Hz | 60 Hz | 60 Hz | 50 Hz | | 60 Hz | 60 Hz | | | |
| | | | 380 V AC | 440 V AC | 460 V AC | 380 V AC | | 440 V AC | 460 V AC | | | |
| | | A | kW | HP | HP | A | kW | HP | HP | | | |
| 380-480 V AC | 30 | CFW110003T4054 | 3.6 | 1.5 | 2 | 2 | 3.6 | 1.5 | 2 | 2 | | |
| | | CFW110005T4054 | 5 | 2.2 | 3 | 3 | 5 | 2.2 | 3 | 3 | | |
| | | CFW110007T4054 | 7 | 3 | 4 | 3 | 5.5 | 2.2 | 3 | 3 | | |
| | | CFW110010T4054 | 10 | 4 | 7.5 | 5 | 10 | 4 | 7.5 | 5 | | |
| | | CFW110013T4054 | 13.5 | 5.5 | 10 | 7.5 | 11 | 4 | 7.5 | 7.5 | | |
| | | CFW110017T4054 | 17 | 7.5 | 12.5 | 10 | 13.5 | 5.5 | 10 | 7.5 | | |
| | | CFW110024T4054 | 24 | 11 | 15 | 15 | 19 | 9.2 | 12.5 | 10 | | |
| | | CFW110031T4054 | 31 | 15 | 20 | 20 | 25 | 11 | 15 | 15 | | |
| | | CFW110038T4054 | 38 | 18.5 | 30 | 25 | 33 | 15 | 25 | 20 | | |
| | | CFW110045T4054 | 45 | 22 | 30 | 30 | 38 | 18.5 | 30 | 25 | | |
| | | CFW110058T4054 | 58.5 | 30 | 40 | 40 | 47 | 22 | 30 | 30 | | |
| | | CFW110070T4054 | 70.5 | 37 | 50 | 50 | 61 | 30 | 50 | 40 | | |
| | | CFW110088T4054 | 88 | 45 | 75 | 60 | 73 | 37 | 60 | 50 | | |
| | | CFW110105T4054 | 105 | 55 | 75 | 75 | 88 | 45 | 75 | 60 | | |
| | | CFW110142T4054 | 142 | 75 | 100 | 100 | 115 | 55 | 75 | 75 | | |

Dimensions and Weight

| Model | NEMA 1 / IP21 | | | | | IP54 | | | | | Braking IGBT | | | |
|-------------|---------------|--------------------|----------------|----------------|-----------------|------|--------------------|----------------|----------------|----------------|--------------------|----------------|----------------|-------------|
| | Size | Dimensions mm (in) | | | Weight kg (lb) | Size | Dimensions mm (in) | | | Weight kg (lb) | | | | |
| | | High (H) | Width (W) | Depth (D) | | | High (H) | Width (W) | Depth (D) | | | | | |
| CFW110006S2 | A | 247 (9.73) | 145 (5.71) | 227 (8.94) | 6.3 (13.9) | 1 | 410 (16.14) | 255 (10.04) | 235 (9.25) | 10 (22.0) | Standard | | | |
| CFW110006B2 | | | | | | | | | | | | | | |
| CFW110007S2 | | | | | | | | | | | | | | |
| CFW110007B2 | | | | | | | | | | | | | | |
| CFW110007T2 | | | | | | | | | | | | | | |
| CFW110010S2 | | | | | | | | | | | | | | |
| CFW110010T2 | | | | | | | | | | | | | | |
| CFW110013T2 | | | | | | | | | | | | | | |
| CFW110016T2 | | | | | | | | | | | | | | |
| CFW110024T2 | | | | | | | | | | | | | | |
| CFW110028T2 | | | | | | | | | | | | | | |
| CFW110033T2 | | | | | | | | | | | | | | |
| CFW110045T2 | | | | | | | | | | | | | | |
| CFW110054T2 | | | | | | | | | | | | | | |
| CFW110070T2 | C | 378 (14.88) | 220 (8.67) | 293 (11.54) | 20.5 (45.2) | 2 | 625 (24.61) | 350 (13.78) | 298 (11.73) | 36 (79.4) | | | | |
| CFW110086T2 | D | 504 (19.84) | 300 (11.81) | 305 (12.01) | 32.6 (71.8) | | | | | 41 (90.4) | | | | |
| CFW110105T2 | E | 675 (26.58) | 335 (13.19) | 358 (14.09) | 65 (143.3) | 3 | 825 | 400 | 389 | 80 | | | | |
| CFW110142T2 | | | | | | - | - | - | - | - | | | | |
| CFW110180T2 | | | | | | - | - | - | - | - | | | | |
| CFW110211T2 | - | - | - | - | - | - | - | - | - | Optional | | | | |
| CFW110003T4 | A | 247 (9.73) | 143 (5.63) | 196 (7.72) | 6.3 (13.9) | 1 | 410 (16.14) | 255 (10.04) | 235 (9.25) | 10 (22.0) | Standard | | | |
| CFW110005T4 | | | | | | | | | | | | | | |
| CFW110007T4 | | | | | | | | | | | | | | |
| CFW110010T4 | | | | | | | | | | | | | | |
| CFW110013T4 | | | | | | | | | | | | | | |
| CFW110017T4 | | | | | | | | | | | | | | |
| CFW110024T4 | | | | | | | | | | | | | | |
| CFW110031T4 | | | | | | | | | | | | | | |
| CFW110038T4 | | | | | | | | | | | | | | |
| CFW110045T4 | | | | | | | | | | | | | | |
| CFW110058T4 | | | | | | | | | | | | | | |
| CFW110070T4 | C | 378 (14.88) | 220 (8.67) | 293 (11.54) | 20.5 (45.2) | 2 | 625 (24.61) | 350 (13.78) | 298 (11.73) | 36 (79.4) | | | | |
| CFW110088T4 | D | 504 (19.84) | 300 (11.81) | 305 (12.01) | 32.6 (71.8) | | | | | 41 (90.4) | | | | |
| CFW110105T4 | E | 675 (26.58) | 335 (13.19) | 358 (14.09) | 65 (143.3) | 3 | 825 | 400 | 389 | 80 | | | | |
| CFW110142T4 | | | | | | | | | | | 875 (34.45) | 400 (15.75) | 374 (14.72) | 80 (276) |
| CFW110180T4 | | | | | | | | | | | | | | |
| CFW110211T4 | - | - | - | - | - | - | - | - | - | Optional | | | | |
| CFW110242T4 | F | 1200 (47.24) | 430 (16.93) | 360 (14.17) | 140 (308.65) | - | - | - | - | - | External DBW-03 | | | |
| CFW110312T4 | | | | | | | | | | | | | | |
| CFW110370T4 | | | | | | | | | | | | | | |
| CFW110477T4 | | | | | | | | | | | | | | |
| CFW110515T4 | G | 1225 (48.23) | 535 (21.06) | 426 (16.77) | 215 (473.99) | - | - | - | - | - | External DBW-03 | | | |
| CFW110601T4 | | | | | | | | | | | | | | |
| CFW110720T4 | | | | | | | | | | | | | | |

| Model | NEMA 1 / IP21 | | | | | Braking IGBT |
|-------------|---------------|---------------|-----------|-----------|-----------|--------------|
| | Size | Dimensions mm | | | Weight kg | |
| | | High (H) | Width (W) | Depth (D) | | |
| CFW110002T5 | B | 315 | 190 | 227 | 9,1 | Standard |
| CFW110004T5 | | | | | | |
| CFW110007T5 | | | | | | |
| CFW110010T5 | | | | | | |
| CFW110012T5 | | | | | | |
| CFW110017T5 | | | | | | |
| CFW110027T5 | | | | | | |
| CFW110044T5 | | | | | | |
| CFW110002T6 | D | 550 | 300 | 305 | 34 | |
| CFW110004T6 | | | | | | |
| CFW110007T6 | | | | | | |
| CFW110010T6 | | | | | | |
| CFW110012T6 | | | | | | |
| CFW110017T6 | | | | | | |
| CFW110022T6 | | | | | | |
| CFW110027T6 | | | | | | |
| CFW110032T6 | | | | | | |
| CFW110044T6 | | | | | | |
| CFW110053T6 | E | 675 | 335 | 358 | 64 | |
| CFW110063T6 | | | | | | |
| CFW110080T6 | | | | | | |
| CFW110107T6 | | | | | | |
| CFW110125T6 | | | | | | |
| CFW110150T6 | | | | | | |
| CFW110170T6 | F | 1234 | 430 | 360 | 168 | |
| CFW110216T6 | | | | | | |
| CFW110289T6 | | | | | | |
| CFW110315T6 | | | | | | |
| CFW110365T6 | G | 1265 | 535 | 426 | 258 | Optional |
| CFW110435T6 | | | | | | |



Mechanical Mounting

Standard Installation



| Frame Size | Minimum Mounting Clearance with top cover | | | |
|------------|---|------------|-----------|-----------|
| | A mm (in) | B mm (in) | C mm (in) | D mm (in) |
| A | 25 (0.98) | 25 (0.98) | 10 (0.39) | 30 (0.39) |
| B | 40 (1.57) | 45 (1.57) | 10 (0.39) | 30 (0.39) |
| C | 110 (4.33) | 130 (5.12) | 10 (0.39) | 30 (0.39) |
| D | 110 (4.33) | 130 (5.12) | 10 (0.39) | 30 (0.39) |
| E, F and G | 150 (5.91) | 250 (9.84) | 20 (0.78) | 80 (3.15) |

When one VSD is assembled above another, use the distance A+B and deflect the hot air coming from the VSD below.

Side by side Installation




For Frame Size A, B and C: side by side assembly without lateral spacing and with the removal of the top cover.



Mechanical Installation | Panel Assembly

Surface Assembly

| Frame Size | a2 mm (in) | b2 mm (in) | c2 mm (in) |
|------------|------------|--------------|------------|
| A | 115 (4.53) | 250 (9.85) | M5 |
| B | 150 (5.91) | 300 (11.82) | M5 |
| C | 150 (5.91) | 375 (14.77) | M6 |
| D | 200 (7.88) | 525 (20.67) | M8 |
| E | 200 (7.88) | 650 (25.60) | M8 |
| F | 150 (5.91) | 1200 (47.24) | M10 |
| G | 200 (7.87) | 1225 (48.23) | M10 |

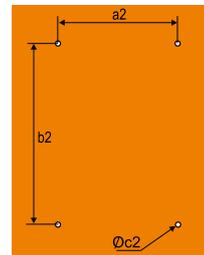

Sizes A up to E




Sizes F and G

Flange Assembly (IP-54 rated when mounting the heat-sink outside the enclosure)

- * From Sizes A to E the inverter area that will be outside the panel has IP 54 protection degree.
- * For Sizes F and G the inverter area that will be outside the panel has only IP20 protection degree.

| Frame Size | a3 mm (in) | b3 mm (in) | c3 mm (in) | d3 mm (in) | e3 mm (in) |
|------------|-------------|--------------|------------|-------------|--------------|
| A | 130 (5.12) | 240 (9.45) | M5 | 135 (5.32) | 225 (8.86) |
| B | 175 (6.84) | 285 (11.23) | M5 | 179 (7.05) | 271 (10.65) |
| C | 195 (7.68) | 365 (14.38) | M6 | 205 (8.08) | 345 (13.59) |
| D | 275 (10.83) | 517 (20.36) | M8 | 285 (11.23) | 485 (19.10) |
| E | 275 (10.83) | 635 (25.00) | M8 | 315 (12.40) | 615 (24.21) |
| F | 350 (13.78) | 1185 (46.61) | M10 | 391 (15.39) | 1146 (45.12) |
| G | 400 (15.75) | 1220 (48.03) | M10 | 495 (19.49) | 1182 (46.53) |

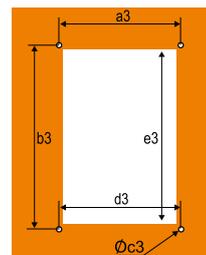

Coding



1 - Market identification

It defines the language of the manual and the factory parameterization

- BR = Brazil
- NA = North America
- MS = Mercosul
- EU = Europe
- SA = South Africa

2 - Line

CFW11 = WEG Frequency VSD series CFW11
Blank = Standard Stand alone unit

3 - CFW11 series model

Blank = Standard Stand alone unit
M = Modular drive

4 - Rated output current for normal overload system

| Supply | Single-phase (S) | Single-phase or Three-phase (B) | Three-Phase (T) | | | | | | |
|---------|------------------|---------------------------------|--|---|---|--|--|---|--|
| | 200-240 V AC (2) | 200-240 V AC (2) | 200-240 V AC (2) | 380-480 V AC (4) | | 500-600 V AC (5) | | 660-690 V AC (6) | |
| Voltage | 0010 = 10 A | 0006 = 6 A 0007 = 7 A | 0007 = 7 A 0010 = 10 A 0013 = 13 A 0016 = 16 A 0024 = 24 A 0028 = 28 A 0033 = 33 A 0045 = 45 A 0054 = 54 A 0070 = 70 A 0086 = 86 A 0105 = 105 A 0142 = 142 A 0180 = 180 A 0211 = 211 A | 0003 = 3 A 0005 = 5 A 0007 = 7 A 0010 = 10 A 0013 = 13 A 0017 = 17 A 0024 = 24 A 0031 = 31 A 0038 = 38 A 0045 = 45 A 0058 = 58 A 0070 = 70 A | 0088 = 88 A 0105 = 105 A 0142 = 142 A 0180 = 180 A 0211 = 211 A 0242 = 242 A 0312 = 312 A 0370 = 370 A 0477 = 477 A 0515 = 515 A 0601 = 601 A 0720 = 720 A | 0002 = 2,9 A 0004 = 4,2 A 0007 = 7 A 0010 = 10 A 0012 = 12 A 0017 = 17 A 0022 = 22 A 0027 = 27 A 0032 = 32 A 0044 = 44 A 0053 = 53 A | 0063 = 63 A 0080 = 80 A 0107 = 107 A 0125 = 125 A 0150 = 150 A 0170 = 170 A 0216 = 216 A 0289 = 289 A 0315 = 315 A 0365 = 365 A 0435 = 435 A | 0002 = 2,9 A 0004 = 4,2 A 0007 = 7 A 0010 = 8,5 A 0012 = 11 A 0017 = 15 A 0022 = 20 A 0027 = 24 A 0032 = 30 A 0044 = 35 A 0053 = 46 A | 0063 = 54 A 0080 = 73 A 0107 = 100 A 0125 = 108 A 0150 = 130 A 0170 = 147 A 0216 = 195 A 0289 = 259 A 0315 = 259 A 0365 = 312 A 0435 = 365 A |

5 - Number of phases

- S = Single-phase
- B = Single-phase or three-phase
- T = Three-phase

6 - Voltage

- 2 = 200-240 V
- 4 = 380-480 V
- 5 = 500 -600 V
- 6 = 660-690 V

7 - Optional Accessories

- S = standard product
- O = product with optional accessories

8 - Degree of Protection

- Blank = factory standard
- (Sizes A, B and C: IP21 - D: Nema 1/ IP20)
- N1 = Nema 1
- 21 = IP21
- (Sizes E,F and G - IP20)

9 - Keypad

- Blank = factory standard (1)
- IC = without interface (blind cover)

10 - Braking

- Blank = factory standard
- (Sizes A, B, C, D: built-in braking IGBT)
- DB = with braking IGBT (valid for models of frame size E)
- For frame sizes F and G the DBW03 has to be used.

11 - RFI Filter

- Blank = factory standard
- FA = Category C3 internal RFI filter
- (Valid for models of frame (size E: built-in RFI filter) Size A, B, C and D)
- Even though frame sizes E, F and G do not show FA in the coding they all have RF filter built-in.

12 - Safety Stop

- Blank = factory standard (without safety stop function)
- Y = with safety stop function according to EN-954-1 category 3

13 - External Electronic Supply 24 V DC

- Blank = factory standard
- W= With external electronic power supply 24 V DC
- (Sizes A,B,C,D,E: Without external electronic power supply 24V DC in the standard product)

14 - Special hardware

- Blank = factory standard (without)
- H1 = special hardware nr. 1

15 - Special Software

- Blank = factory standard (without)
- S1 = special software nr. 1



16 - End of Code indicator digit

- Z = end of code indicator

CFW11M - Modular Drive

The CFW11M is the new generation of WEG frequency inverters for large power ranges. It ranges from 350kW to 2000kW (350 to 2500HP) rated at 380-480 V / 500-600 V / 660-690 V with the option for 6, 12 pulses or even regenerative(AFE).

Rectifier Unit (Books)

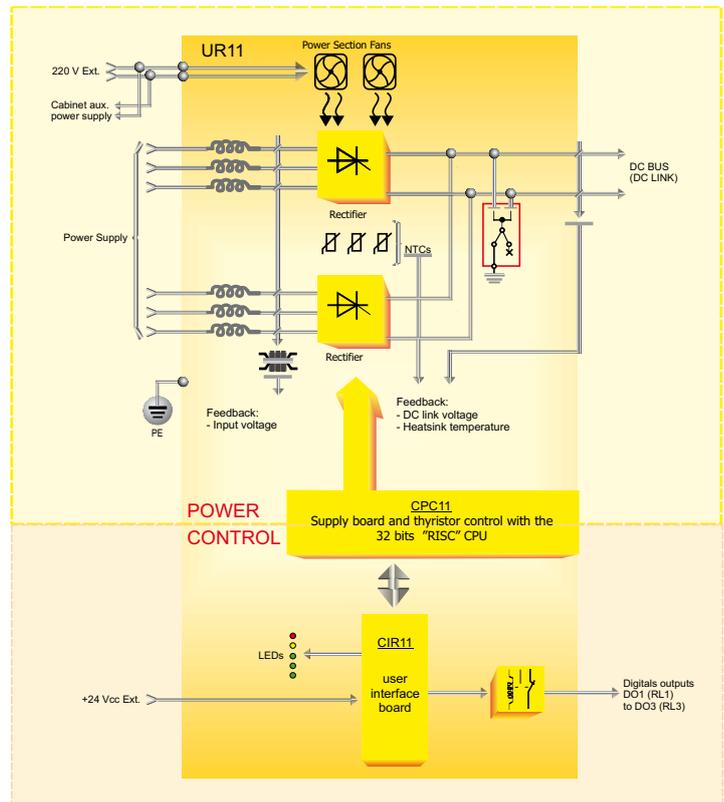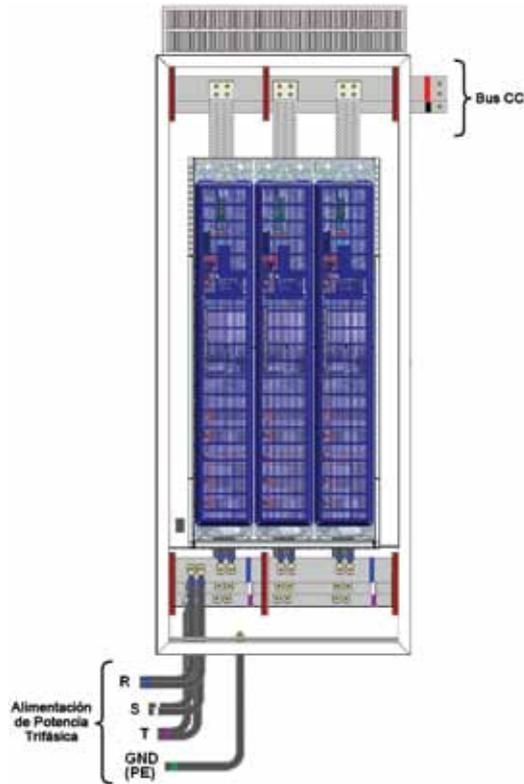

Notes: The fuses presented in the block diagram above are not included in the VSD CFW11M, but are part of the AFW-11M drive
Maximum AFW-11M configuration with 5 power units (2500 HP)



Power Book Unit



Output to motor



Power Units

Compact modular VSD units that can be configured to the applicable motor power.

- Easy servicing.
- Configurable up to 5 power units.
- DC supplied by an input rectifier.
- Compact book format (width much smaller than the depth).

Configurable up to 5 power book units

CFW11M - Modular Drive

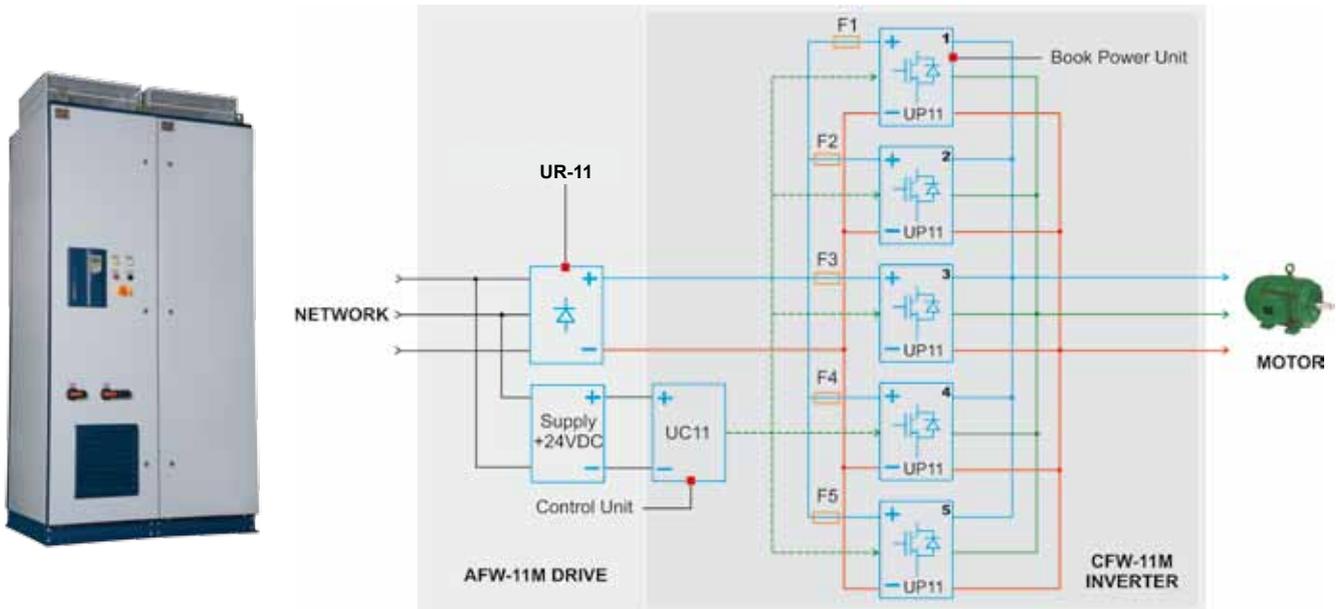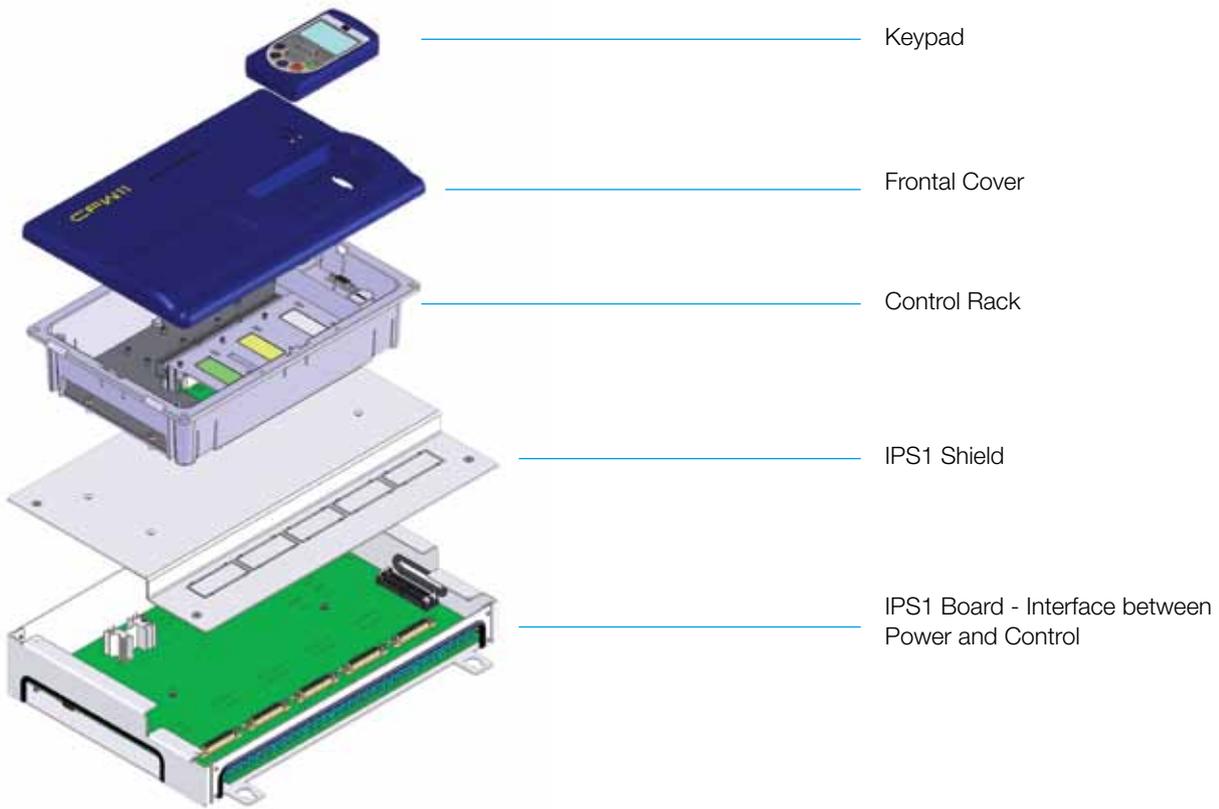

CFW11M - Drive Ratings

Sizing the Drive

The correct way to select a VSD is matching its output current with the motor rated current. However, the tables below present the expected motor power for each VSD model. Use the motor power ratings below only as a guidance. Motor rated currents may vary with speed and manufacturer. IEC motor powers are based on WEG 4-pole motors; NEMA motor powers are based on NEC table 430-150.

Motor Voltages between 380-480 V

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | Heavy Duty (HD) | IEC | | NEMA | |
|--------------|-------|------------------|-------------------------------|-------------------------------|-------------------|-----------------|-------------------------------|-------------------------------|-------------------|------|
| | | | 50 Hz 380 V AC 415 V AC | 60 Hz 380 V AC 460 V AC | 60 Hz 460 V AC | | 50 Hz 380 V AC 415 V AC | 60 Hz 380 V AC 460 V AC | 60 Hz 460 V AC | |
| | | A | kW | HP | HP | A | kW | HP | HP | |
| 380-480 V | 3Ø | CFW11M 0600T4 | 600 | 315 | 450 | 500 | 515 | 280 | 350 | 450 |
| | | CFW11M 1140T4 | 1140 | 630 | 850 | 1000 | 979 | 500 | 700 | 800 |
| | | CFW11M 1710T4 | 1710 | 900 | 1250 | 1500 | 1468 | 800 | 1100 | 1250 |
| | | CFW11M 2280T4 | 2280 | 1250 | 1750 | 2000 | 1957 | 1120 | 1350 | 1750 |
| | | CFW11M 2850T4 | 2850 | 1600 | 2000 | 2500 | 2446 | 1250 | 1750 | 2000 |

Motor Voltages between 500-600 V

| Power Supply | Model | Normal Duty (ND) | IEC | | NEMA | Heavy Duty (HD) | IEC | | NEMA | |
|--------------|-------|------------------|-------------------------------|-------------------|-------------------|-----------------|-------------------------------|-------------------|-------------------|------|
| | | | 50 Hz 525 V AC 575 V AC | 60 Hz 575 V AC | 60 Hz 575 V AC | | 50 Hz 525 V AC 575 V AC | 60 Hz 575 V AC | 60 Hz 575 V AC | |
| | | A | kW | HP | HP | A | kW | HP | HP | |
| 500-600 V | 3Ø | CFW11M 0470T5 | 470 | 355 | 500 | 500 | 380 | 280 | 400 | 400 |
| | | CFW11M 0893T5 | 893 | 630 | 1000 | 1000 | 722 | 500 | 800 | 800 |
| | | CFW11M 1340T5 | 1340 | 1000 | 1350 | 1500 | 1083 | 800 | 1250 | 1100 |
| | | CFW11M 1786T5 | 1786 | 1250 | 1750 | 1750 | 1444 | 1120 | 1500 | 1350 |
| | | CFW11M 2232T5 | 2232 | 1600 | 2500 | 2500 | 1805 | 1400 | 2000 | 2000 |

Motor Voltages between 660-690 V

| Power Supply | Model | Normal Duty (ND) | IEC | | Heavy Duty (HD) | IEC | | |
|--------------|-------|------------------|-------------------------------|-------------------|-----------------|-------------------------------|-------------------|------|
| | | | 50 Hz 660 V AC 690 V AC | 60 Hz 660 V AC | | 50 Hz 660 V AC 690 V AC | 60 Hz 660 V AC | |
| | | A | kW | HP | A | kW | HP | |
| 660-690 V | 3Ø | CFW11M 0427T6 | 427 | 400 | 550 | 340 | 315 | 400 |
| | | CFW11M 0811T6 | 811 | 710 | 1000 | 646 | 560 | 800 |
| | | CFW11M 1217T6 | 1217 | 1120 | 1500 | 969 | 900 | 1250 |
| | | CFW11M 1622T6 | 1622 | 1600 | 2000 | 1292 | 1250 | 1750 |
| | | CFW11M 2028T6 | 2028 | 2000 | 2500 | 1615 | 1400 | 2000 |

Technical Data

| Power supply and Power Range | | |
|------------------------------|------------------------------|--|
| Voltage and power range | Single Phase | 220-240 V AC (+10%, -15%) 1.5 to 3 HP (1.1 to 2.2 kW) |
| | Three Phases | 220-240 V AC (+10%, -15%) 1.5 to 75 HP (1.1 to 55 kW) |
| | | 380-480 V AC (+10%, -15%) 2 to 600 HP (1.5 to 415 kW) |
| | | 500-600 V AC (+10%, -15%) 2 to 450 HP (1.5 to 315 kW) |
| | | 660-690 V AC (+10%, -15%) 3 to 450 HP (1.5 to 355 kW) |
| Frequency | 50/60 Hz (+/-2%: 48 a 63 Hz) | |
| Displacement factor | Greater than 0.98 | |
| Efficiency | Greater than 0.97 | |

| Inverter Output | | |
|---------------------|---|----------------------------|
| Voltage range | Three Phase, 0 up to power supply voltage | |
| Frequency range | 0 to 3.4x motor rated frequency (*) | |
| Switching Frequency | Standard: 5 kHz (frame sizes A, B, C, D); 2.5 kHz (frame sizes E and F); 2 kHz (frame size G) Options available 2.5 / 5 / 10 kHz | |
| Overload | Normal Duty Cycle | 110% for 1 min every 10min |
| | | 150% for 3 sec every 10min |
| | Heavy Duty Cycle | 150% for 1 min every 10min |
| | | 200% for 3 sec every 10min |
| Time (ramps) | Acceleration | 0 to 999 seconds |
| | Deceleration | 0 to 999 seconds |

| Environment | | |
|--------------------------|--|--|
| Temperature of Operation | 220-240 V AC | -10 °C to 50 °C (frame sizes A, B, C, D) |
| | 380-480 V AC | -10 °C to 45 °C (frame sizes E, F and G) |
| | 500-690 V AC | -10 °C to 50 °C (frame sizes B and D) |
| | | -10 °C to 45 °C (frame sizes E, F and G) |
| | NEMA4x / IP54 | -10 °C a 40 °C |
| | 380-480 V AC | -10 °C to 45 °C (AFW11 - modulate) |
| | 500-690 V AC | -10 °C to 40 °C (AFW11 - modulate) |
| | Up to 60 °C with current derating for frame sizes A, B, C and D Up to 55 °C with current derating for frame size E Up to 45 °C with current derating for frame sizes F and G >> 2% current derating for each °C over the base temperature | |
| Humidity | 5 to 90% without condensation | |
| Altitude | 0 to 1000 meters Up to 4000 meters with current reduction (1% for every 100 meters above 1000 meters) | |

| Protection Degree | |
|-------------------|--|
| IP21 | Standard for frame sizes A, B, C. For frame size D the top cover kit has to be added. Frame Sizes E, F and G option not available. |
| IP20 | Standard for frame sizes D, E, F and G. Frame Sizes A, B and C the top cover has to be removed. |
| NEMA1 | Standard for frame Size D. Optional for frame sizes A, B, C, E, F and G. |
| IP54 | Frame Sizes 1, 2 and 3. |

| Braking Methods | |
|--------------------|--|
| Rheostatic Braking | Supply available to user (standard for frame size A, B, C and D and option for frame size E) |
| | External braking resistor (not provided) |
| Optimal Braking | Does not need braking resistor |
| DC Braking | Direct current applied to the motor |

| Performance | | |
|-------------------|---|---|
| Speed Control | V/f | Regulation: 1% of rated speed |
| | | Speed variation range: 1:20 |
| | Voltage Vector (VVW) | Regulation: 1% of rated speed |
| | | Speed variation range: 1:30 |
| Sensorless Vector | Regulation: 0.5% of rated speed | |
| | Speed variation range: 1:100 | |
| Torque Control | Vector with Encoder (with accessory ENC-01 or ENC-02) | Regulation: ± 0.01% of rated speed with 14-bit analog input (IOA) |
| | | Regulation: ± 0.01% of rated speed with digital reference (keyboard, serial fieldbus, electronic potentiometer, multispeed) |
| | Sensorless Vector | Regulation: ± 0.05% of rated speed with 12-bit analog input |
| | | Range: 10 to 180% |
| Sensorless Vector | Regulation: ± 5% of rated torque | |
| | Range: 20 to 180% | |
| Sensorless Vector | Regulation: ± 10% of rated torque (above 3 Hz) | |

| Inputs and Outputs (I/Os) in the Standard Product | | |
|---|------------------------|---|
| Inputs | Digital | 6 isolated inputs, 24 V DC, programmable functions |
| | Analog | 2 differential inputs isolated by differential amplifier, programmable functions |
| | | Resolution: - AI1: 12 bits - AI2: 11 bits + signal |
| | | Signals: 0 to 10 V DC, 0 to 20mA or 4 to 20mA |
| Outputs | Relay | 3 relays with NO / NC contacts, 240 V AC / 1A, programmable functions |
| | | 2 isolated outputs, programmable functions |
| | Analog | Resolution: 11 bits |
| | | Load: 0 to 10 V: R _L ≥ 10 kΩ 0 to 20 mA or 4 to 20 mA: R _L < 500Ω |
| Available supply to user | 24 V DC + -20%, 500 mA | |

(*) This maximum value can change according to the used control mode and switching frequency. The maximum permissible speed is 1800rpm.

Technical Data

| Communication | |
|----------------------|--|
| Profibus DP | PROFIBUS DP-01 (slot 3) PROFDP-05 (slot 4) |
| DeviceNet | CAN/RS485-01 (slot 3) |
| | CAN-01 (slot 3) |
| | DEVICENET-05 (slot 4) |
| CANopen | CAN/RS485-01 (slot 3) |
| | CAN-01 (slot 3) |
| CANopen Master/Slave | PLC11-01 1, 2 and 3 |
| Ethernet / IP | ETHERNET/IP-05 (slot 4) |
| Modbus TCP | Modbus TCP-05 (slot 4) |
| Profinet IO | PROFINETIO-05 (slot 4) |
| ModBus RTU (RS485) | RS485-01 (slot 3) |
| | CAN/RS485-01 (slot 3) |
| | RS485-05 (slot 4) |
| ModBus RTU (RS232) | RS232-01 and RS232-02 (slot 3) |
| | RS232-05 (slot 4) |
| USB | Built into the standard product |
| | Communication with SuperDrive G2 Software |
| | Communication with WLP Software used for programming and monitoring the SoftPLC function and the PLC11 accessories |

| Safety Standards |
|---|
| UL 508C Power conversion equipment |
| UL 840 Insulation coordination including clearances and creepage distances for electrical equipment |
| EN 61800-5-1 Safety requirements electrical, thermal and energy |
| EN 50178 Electronic equipment for use in power installations |
| EN 60204-1 Safety of machinery. Electrical equipment of machines. Part 1: General requirements. Note: In order to have a machine in conformity with this norm, the machine manufacturer is responsible for the installation of an emergency shutdown device and an equipment for network sectioning |
| EN 60146 (IEC 146) Semiconductor converters |
| EN 61800-2 Adjustable speed electrical power drive systems – Part 2: General requirements – rating specifications for low voltage adjustable frequency a.c. power drive systems |

| Mechanical Construction Standards |
|---|
| EN 60529 - Degrees of protection provided by enclosures (IP Code) |
| UL 50 - Enclosures for electrical equipment |

| Protections |
|--|
| Overcurrent / short circuit |
| Under / overvoltage in the power circuit |
| Phase loss |
| Overtemperature in the VSD (IGBTs, rectifier and internal air in the electronic cards) |
| Overtemperature in the motor |
| Overload in the braking resistor |
| Overload in the IGBTs |
| Overload in the motor |
| Fault / external alarm |
| Fault in the CPU or memory |
| Phase-to-ground short circuit at the output |
| Fault in the heatsink fan |
| Motor Overspeed |
| Incorrect connection of encoder |

| Electromagnetic Compatibility Standards (EMC) |
|--|
| EN 61800-3 - Adjustable speed electrical power drive systems Part 3: EMC product standard including specific test methods |
| EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment |
| CISPR 11 - Industrial, scientific and medical (ISM)radio-frequency equipment Electromagnetic disturbance characteristics Limits and methods of measurement |
| EN 61000-4-2 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test |
| EN 61000-4-3 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 3:Radiated, radiofrequency, electromagnetic field immunity test |
| EN 61000-4-4 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 4: Electrical fast transient / burst immunity test |
| EN 61000-4-5 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 5: Surge immunity test |
| EN 61000-4-6 - Electromagnetic Compatibility Standards (EMC) Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields |

WEG Worldwide Operations

ARGENTINA

WEG EQUIPAMIENTOS
ELECTRICOS
San Francisco - Cordoba
Phone: +54 (3564) 421484
info-ar@weg.net
www.weg.net/ar

WEG PINTURAS - Pulverlux
Buenos Aires
Phone: +54 (11) 42998000
tintas@weg.net

AUSTRALIA

WEG AUSTRALIA
Victoria
Phone: 61 (3) 9765 4600
info-au@weg.net
www.weg.net/au

AUSTRIA

WATT DRIVE - WEG Group
Markt Piesting - Viena
Phone: +43 (0) 2633 404 0
watt@wattdrive.com
www.wattdrive.com

BENELUX

WEG BENELUX
Nivelles - Belgium
Phone: +55 (67) 88-8420
info-be@weg.net
www.weg.net/be

BRAZIL

WEG EQUIPAMENTOS ELÉTRICOS
Jaraguá do Sul - Santa Catarina
Phone: +55 (47) 3276-4002
info-br@weg.net
www.weg.net/br

CHILE

WEG CHILE
Santiago
Phone: (56-2) 784 8900
info-cl@weg.net
www.weg.net/cl

CHINA

WEG NANTONG
Nantong - Jiangsu
Phone: (86) 0513-85989333
info-cn@weg.net
www.weg.net/cn

COLOMBIA

WEG COLOMBIA
Bogotá
Phone: (57 1) 416 0166
info-co@weg.net
www.weg.net/co

FRANCE

WEG FRANCE
Saint Quentin Fallavier - Lyon
Phone: +33 (0) 4 74 99 11 35
info-fr@weg.net
www.weg.net/fr

GERMANY

WEG GERMANY
Kerpen - North Rhine Westphalia
Phone: +49 (0)2237/9291-0
info-de@weg.net
www.weg.net/de

GHANA

ZEST ELECTRIC GHANA
WEG Group
Accra
Phone: 233 30 27 664 90
info@zestghana.com.gh
www.zestghana.com.gh

INDIA

WEG ELECTRIC INDIA
Bangalore - Karnataka
Phone: +91-80-4128 2007
info-in@weg.net
www.weg.net/in

WEG INDUSTRIES INDIA
Hosur - Tamil Nadu
Phone: 04344-261501
info-in@weg.net
www.weg.net/in

ITALY

WEG ITALIA
Cinisello Balsamo - Milano
Phone: (39) 02 6129-3535
info-it@weg.net
www.weg.net/it

JAPAN

WEG ELECTRIC MOTORS
JAPAN
Yokohama City - Kanagawa
Phone: (81) 45 440 6063
info-jp@weg.net
www.weg.net/jp

MEXICO

WEG MEXICO
Huehuetoca
Phone: +52 (55) 5321 4275
info-mx@weg.net
www.weg.net/mx

VOLTRAN - WEG Group
Tizayuca - Hidalgo
Phone: + 52 (77) 9796 3790
www.voltran.com.mx

NETHERLANDS

WEG NETHERLANDS
Oldenzaal - Overijssel
Phone: +31 (0) 541-571080
info-nl@weg.net
www.weg.net/nl

PERU

WEG PERU
Lima
Phone: (51 1) 472 3204
info-pe@weg.net
www.weg.net/pe

PORTUGAL

WEG EURO
Maia - Porto
Phone: +351 229 477 705
info-pt@weg.net
www.weg.net/pt

RUSSIA

WEG RUSSIA
Saint Petersburg
Phone: +7(812)363-21-72
info-ru@weg.net
www.weg.net/ru

SOUTH AFRICA

ZEST ELECTRIC MOTORS
WEG Group
Johannesburg
Phone: (27-11) 723-6000
info@zest.co.za
www.zest.co.za

SPAIN

WEG IBERIA
Madrid
Phone: (34) 916 553 008
info-es@weg.net
www.weg.net/es

SINGAPORE

WEG SINGAPORE
Singapore
Phone: +65 6858 9081
info-sg@weg.net
www.weg.net/sg

SCANDINAVIA

WEG SCANDINAVIA
Kungsbacka - Sweden
Phone: (46) 300 73400
info-se@weg.net
www.weg.net/se

UK

WEG ELECTRIC MOTORS U.K.
Worcestershire - England
Phone: 44 (0)1527 596-748
info-uk@weg.net
www.weg.net/uk

UNITED ARAB EMIRATES

WEG MIDDLE EAST
Dubai
Phone: +971 (4) 8130800
info-ae@weg.net
www.weg.net/ae

USA

WEG ELECTRIC
Duluth - Georgia
Phone: +1 678 249 2000
info-us@weg.net
www.weg.net/us

ELECTRIC MACHINERY
WEG Group
Minneapolis - Minnesota
Phone: +1 612 378 8000
www.electricmachinery.com

VENEZUELA

WEG INDUSTRIAS VENEZUELA
Valencia - Carabobo
Phone: (58) 241 8210582
info-ve@weg.net
www.weg.net/ve

For those countries where there is not a WEG own operation, find our local distributor at www.weg.net.



Grupo WEG - Automation Business Unit
Jaraguá do Sul - SC - Brazil
Phone: +55 (47) 3276-4000
automacao@weg.net
www.weg.net

